

PROFITAP

F1L 1-Link LC Fiber Optic Tap



Portable Model



Rack Mount Model

CUSTOMER SUPPORT INFORMATION

To order or for technical information support:

Phone: +31 (0) 40 782 0880

Mail order: Profitap HQ B.V.

High Tech Campus 9

5656 AE Eindhoven - The Netherlands

Website: www.profitap.com

E-mail: info@profitap.com

Index	pages
1. General Information	3
2. Installation	4
3. Rack Mount Modules	5
4. Fiber types	6
5. Additional information	7
6. Disclaimer / Warranty	8

SA-Fiber Optic Tap



Stand alone model

1. General Information


The Fiber Optic Tap offers a perfect and cost effective solution to tap Networks for IDS (security), SNMP (management), RMON (remote) and Protocol Analysis.

The unit is easy to install, fault tolerant, transparent to the Network. It monitors the communication between two Network devices and is designed for use in Ethernet, Fast and GigaBit Ethernet, ATM, SONET, FDDI Networks and more. It is “all-optical” and works at any data-rate.

It has 2 dual LC connectors for connecting Network devices plus 1 dual LC connector for connecting the Analyzer. The Tap will continue to pass information in the Network also when the Analyzer is taken away.

It is compact and housed in a rigid metal enclosure. It requires no electrical power.

2. Installation

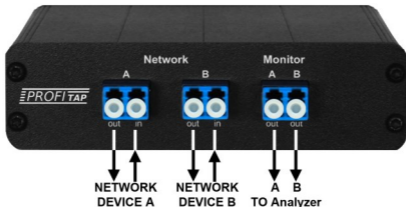

Connect the Fiber Optic Tap as shown above.

The Tap works in Full Duplex as well as Half Duplex Mode. The information passes from one Network device to the other, the split rate decides how much is passed to the Analyzer: 50/50 split passes 50% to the Analyzer, 80/20 split passes 20% to the Analyzer.

Note:

Dirt increases connector loss and can in certain cases block the signal totally. Leave the dust caps on the device if not in use. Mount back the dust caps if the Analyzer is taken away.

3. Rack modules

RM-Fiber Optic Tap



Rack mount model

The Fiber Optic rack modules are designed to fit, together with rack mount plates, in 19 inch rack Systems. The Rack modules plug easily in the rack mount plates.



Rack mounted

4. Fiber types

Maximum Insertion Loss (dB)

Split ratio	50/50	60/40	70/30	80/20
Multi Mode 50/62.5+10Gb	4.0/4.0	3.0/5.0	2.4/6.3	1.8/8.1
Single Mode	3.6/3.6	2.7/4.7	1.9/6.0	1.2/7.9

MultiMode 50/62.5 μ m..... Dual Wavelength 850/1300nm

MultiMode 10Gb/50 μ m..... Wavelength 850nm

Single ModeDual Wavelength 1310/1550nm

5. Additional information

Mechanical Specifications:

Housing: Aluminium
Black Front panel

Connectors: 3 x dual LC, Zirconia sleeve

Dimensions:

F1PL: 113 x 88 x 30 mm (WxDxH)

F1RL: 113 x 88 x 30 mm (WxDxH)

F1RL Front Panel: 143 x 35 mm (WxH)

Weight:

F1PL: 174 g

F1RL: 180 g

Environmental Specifications:

Operating Temperature: 0°C to 55°C

Storage Temperature: -10°C to 90°C

Humidity: 10-90%, non-condensing

Certifications: RoHS, CE

Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

Warranty and Liability

Profitap warrants that this product is free from defects in material and workmanship at time of shipment. The warranty period is 2 years from the date of purchase. The standard 2 year warranty period may be extended at the time of order. Profitap assumes no liability for products that have been subjected to abuse, modification, misuse, or if the model or serial number has been altered, tampered with, defaced or removed. Profitap is not liable under any contract, negligence, strict liability or other legal or equitable theory for any loss of use of the product, inconvenience or damages of any character, whether direct, special, incidental or consequential (including, but not limited to, damages for loss of goodwill, loss of revenue or profit, work stoppage or malfunction)

Copyright

This publication, including all photographs and illustrations, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without written consent of the author

Trademarks

The trademarks mentioned in this manual are the sole property of their owners.

v3.1



Profitap HQ B.V.
High Tech Campus 9
5656 AE Eindhoven
The Netherlands



+31 (0) 40 782 0880

www.profitap.com

