



PROFITAP

C1-100

10-100 Mb Ethernet Copper Tap



Portable Model C1P-100



Rack Mount Model C1R-100

CUSTOMER SUPPORT INFORMATION

To order or for a technical information support:

Phone: +33 3 88 10 18 30 or

Fax: +33 3 88 10 18 35

Mail order: COMCRAFT

17A, rue des Frères Lumière


67201 Eckbolsheim - France

Website: www.profitap.com

E-mail: info@profitap.com

Index	pages
1. General Information	3
2. Functional Description	4
2.1. Interface connectors	4
2.2. Activity/Link	4
2.3. Power	4
2.4. Power Failure	4
3. Installation	5
4. Rack modules	6
5. Additional information	7

C1P-100

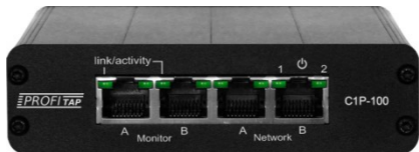

Portable model

1. General Information.

C1-100 tap avoids downtime in your 10/100BaseT networks. Once in place it enables you to monitor full and half duplex communication and move test equipment without breaking the circuit. It mirrors any packet size, bad CRC, VLAN traffic, sees both ends of full-duplex links.

It is a single port 10BaseT/100BaseTX Tap for half/full duplex Ethernet networks. The “no package loss” and redundant power feature makes it ideal for security applications.

C1-100 tap is invisible to the network. It is fault tolerant, bypasses data on power failure, the monitor (TAP) ports are none-intrusive to the network.

2. Functional description

2.1 Interface connectors

It has 4 RJ45 ports, port A and B are connected to the network, TAP ports A and B are connected to the analyzer. Network ports A and B are hardware wired together.

2.2 Activity/Link

Two LEDs indicate Activity in 10Mb and Link in 100Mb speed. Activity LED A lights up when a signal is received at port A, LED B for a signal received at port B. The brightness of the Activity LED show signal strength.


2.3 Power

C1-100 tap is redundant powered from the back. Using redundant powering guarantees a maximum uptime off the tap/monitor ports. Two LEDs show the presence of power.

2.4 Power Failure

Uninterrupted link in the network guarantees permanent network connectivity, also when power fails. Redundant powering guarantees maximum uptime of the monitor ports. No data is passed to the TAP ports at power failure.

3. Installation

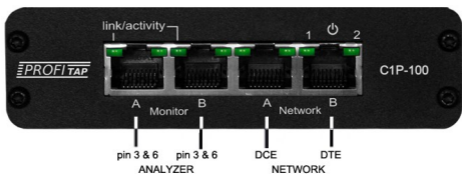


- a. Power the unit using the 12V PSU, the Power LED lights
- b. Connect it into the network using Category 5 UTP cables.

Network Port A : to DCE by straight Cable / to DTE by cross-over cable.
Network Port B : to DTE by straight Cable / to DCE by cross-over cable.
TAP port A and B : to analyzer through straight cables (pins 3/6 active).
The maximum distance between any of the connected devices is 90mtr.

TAP port A mirrors data received in Port A, TAP port B mirrors data received in Port B.

4. Rack modules.

C1R-100

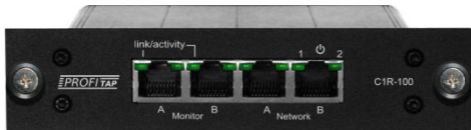

Rack mount model

The C1-100 rack modules are designed to fit, together with rack mount plates, in 19 inch rack Systems. The C1-100 rack modules do not include one AC adapter as several units can be Power chained. The Rack modules plug easily in the rack mount plates.



Rack mounted

5. Additional information.

Mechanical Specifications:

Enclosure: Aluminium
Black Front panel

Powered by external adapter: 90-240VAC / 12V-500mA

Power consumption for one unit: 12V-100mA

LEDs: 4x Link/Activity, 2x Network speed , 2x Power

Connectors: 4x RJ45, 8 pin, gold plated

Dimensions:

C1P-100 : 110 x 85 x 30 mm (WxDxH)

C1R-100 : 110 x 85 x 35 mm (WxDxH) Front Panel :143x35 mm

Weight : 250 gr

Latency : Less than 1 bit at 100Mbps

Environmental Specifications:

Operating Temperature: 0°C to 50°C

Storage Temperature: -22°C to 70°C

Humidity: 10 to 90%, non-condensing

Certifications: RoHS, CE, FCC class A

Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

Warranty and Liability

Comcraft warrants that this product is free from defects in material and workmanship at time of shipment. The warranty period is 2 years from the date of purchase. The standard 2 year warranty period may be extended at the time of order. Comcraft assumes no liability for products that have been subjected to abuse, modification, misuse, or if the model or serial number has been altered, tampered with, defaced or removed. Comcraft is not liable under any contract, negligence, strict liability or other legal or equitable theory for any loss of use of the product, inconvenience or damages of any character, whether direct, special, incidental or consequential (including, but not limited to, damages for loss of goodwill, loss of revenue or profit, work stoppage or malfunction)

Copyright

This publication, including all photographs and illustrations, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without written consent of the author

Trademarks

The trademarks mentioned in this manual are the sole property of their owners.

Rev 3.2



COMCRAFT
17A, rue des Frères Lumière
67201 Eckbolsheim
France



+33 3 88 10 18 30



+33 3 88 10 18 35

www.profitap.com

