

Full Duplex Fast Ethernet Monitoring Copper TAP series

C1P-100 C1R-100




Designed for cost effective connection and efficient monitoring your network:

single Port Copper TAP

This TAP is a straight forward solution. It is a perfect connectivity product for various appliances like :



IDS (security) tools
Packet Flow Switches
Consolidating Tools
Network Monitoring
Protocol Analysis

In-Line it passively monitors all 7 protocol layers, It mirrors any packet size, bad CRC, VLAN traffic and sees both ends of full-duplex links, offering :

- Non intrusive In-Line Monitoring
- Permanent Network Link guaranteed
- Bypass data on power failure
- Monitoring for all Protocol Levels
- Fully 802.3af & VoIP compliant
- No Package Loss
- Works at 100mtrs distance
- Galvanic separation for maximum protection
- Redundant power option (optional)
- All In and Out Ports & all Monitorports at frontside
- Tested with major analysis & monitoring systems
- Optional redundant Power
- Also available with Industrial Power 20-30VDC and DIN Rail Clip  (= C1D-100)

General Application: (all models)

for use with 2 Channel Hardware or Software Analyzer or Aggregation facilities/appliances at 10/100 Networks:

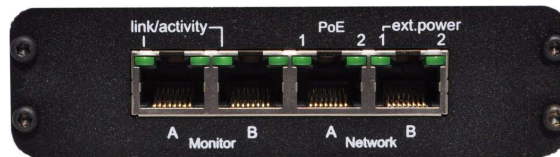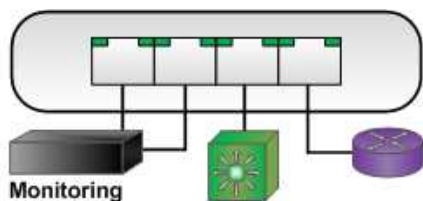

Available Models:

C1P-100 single Port 10/100 UTP TAP



Portable Version, incl. external Powersupply incl. Zipperpouch, incl. Manual

C1R-100 single Port 10/100 UTP TAP



Rackmountable Version incl. external Power Supply, incl. Manual

Optional Accessoires:

19" Rack Plate 1U (ARP1U-1M) C1R-100 only

Filling Plate (AFP1U) C1R-100 only

extra external Powersupply Redundancy (APWR1) all models


Specification:

Connectors 4* RJ45, 8 pin
powered by ext. Adapter : 90-240V/12V 2 A
Power Consumption (all models) ~80mA
Metal housing, structured black oven painted
Operating Temperature : 0°C to 50°C
Storage Temperature : -10°C to 80°C
Humidity : 10% to 90%, none condensing

Weight& Size:

C1P-100 11,3x8,8x3 cm (WxDxH), 240gr.

C1R-100 11,3x8,8x3 cm (WxDxH), 240gr.

Conformity:  

Made in EU

PROFITAP

Headquarters:

+33 (0) 310 1830

+33 (0) 310 1835

info@lan-wan-tap.com

www.lan-wan-tap.com

Sales Office:

+49 (0) 6192 922 422 6

+49 (0) 6192 922 422 7

+49 (0) 6192 922 422 8

sales@profitap.com

www.profitap.com

Real Time & In-LineTAPS by Comcraft/ProfitAP - © 2011